


Grounding sets for terminations

Grounding sets for outdoor terminations

According to the desirable grounding scheme of HV cable systems Brugg offers a complete range of standard solutions applicable to all terminations from 72.5 kV up to 550 kV. Each set is provided with all necessary support elements for an easy and fast installation on site.

Product main features

- Compact dimensions
- Sheath voltage limiters (SVL) up to 10 kV
Class I acc. IEC 60099-4
- Easy and fast to install
- For indoor and outdoor application

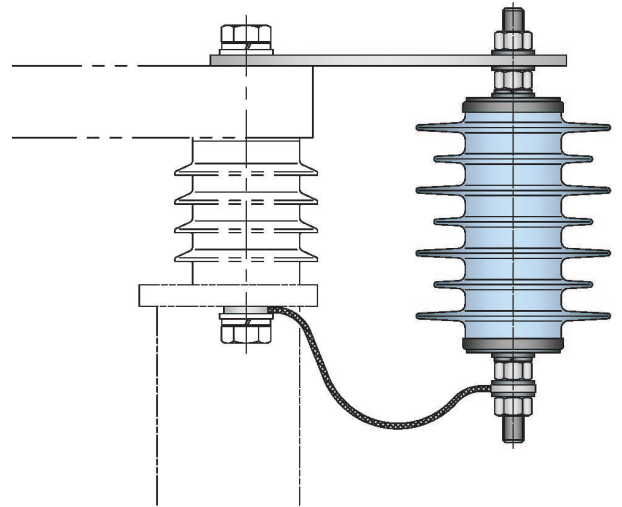

Ordering information

Type	Grounding type	Drawing	SVL kV (Ur)	Part no
Blade disconnecting link	Direct grounding	S1903-4		87893
Strap disconnecting link	Direct grounding	S1899-4		89402
SVL set for outdoor terminations up to 550 kV	Single bonding with SVL	S1901-4	3	89420
SVL set for outdoor terminations up to 550 kV	Single bonding with SVL	S1901-4	6	89421
SVL set for outdoor terminations up to 550 kV	Single bonding with SVL	S1901-4	9	89422
SVL set for outdoor terminations up to 550 kV	Single bonding with SVL	S1901-4	10	89423