


## Grounding sets for terminations

# Grounding sets for GIS and Transformer terminations

According to the desirable grounding scheme of HV cable systems Brugg offers a complete range of standard solutions applicable to all terminations from 72.5 kV up to 550 kV. Each set is provided with all necessary support elements for an easy and fast installation on site.

### Product main features

- Compact dimensions
- Sheath voltage limiters (SVL) up to 10 kV Class I acc. IEC 60099-4
- Easy and fast to install
- For indoor and outdoor application

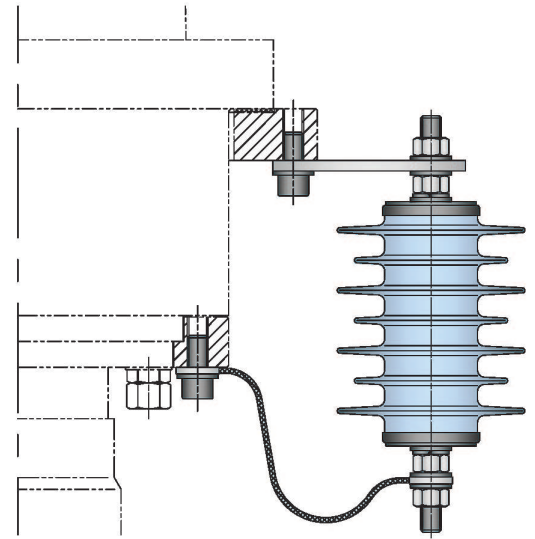

### Ordering information

Type	Grounding type	Drawing	SVL kV (Ur)	Part no
Flexible braids set for TFD from 72 kV up to 145 kV	Direct grounding	S2055		60366
Flexible braids set for terminations up to 170 kV	Direct grounding	S1907-4		89418
Flexible braids set for terminations from 245 kV up to 550 kV	Direct grounding	S1907-4		89419
SVL set for terminations TFD from 72 kV up to 145 kV	Single bonding with SVL	S2056	3	80191
SVL set for terminations TFD from 72 kV up to 145 kV	Single bonding with SVL	S2056	6	80192
SVL set for terminations TFD from 72 kV up to 145 kV	Single bonding with SVL	S2056	9	80193
SVL set for terminations TFD from 72 kV up to 145 kV	Single bonding with SVL	S2056	10	80194
SVL set for terminations up to 170 kV	Single bonding with SVL	S1902-4	3	89410
SVL set for terminations up to 170 kV	Single bonding with SVL	S1902-4	6	89411
SVL set for terminations up to 170 kV	Single bonding with SVL	S1902-4	9	89412
SVL set for terminations up to 170 kV	Single bonding with SVL	S1902-4	10	89413
SVL set for terminations from 245 kV up to 550 kV	Single bonding with SVL	S1902-4	3	89414
SVL set for terminations from 245 kV up to 550 kV	Single bonding with SVL	S1902-4	6	89415
SVL set for terminations from 245 kV up to 550 kV	Single bonding with SVL	S1902-4	9	89416
SVL set for terminations from 245 kV up to 550 kV	Single bonding with SVL	S1902-4	10	89417