

Fixing Clamps

Clamp type BFBT 1

Composed of


Body made of cast aluminium with stainless steel A2 bolts and rubber insert, including fastening bolts

To provide with PO's

Type of fixing
Cable diameter
Cable type

To order separately:

Supporting cross type STKR
Profile rail type PS
Slot nut type PSVN

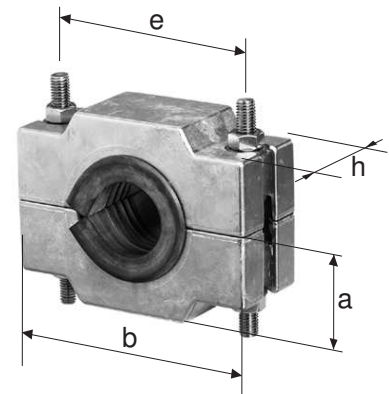

Dimension	a mm	b mm	e mm	h mm	Screws mm	Drawing
1040 - 1073	60	160	130	60	M 12 x 160	S1467-4
2068 - 2088	65	175	145	60	M 12 x 170	S1468-4
3083 - 3108	75	200	170	60	M 12 x 190	S1469-4
4103 - 4133	90	245	210	80	M 16 x 220	S1470-4
5128 - 5148	100	255	220	100	M 16 x 240	S1471-4

Part no	Type	Cable Ø mm	Part no	Type	Cable Ø mm
88850	BFBT1-1040	37.6 - 40.0	88723	BFBT1-3095	92.6 - 95.0
88851	BFBT1-1043	40.1 - 42.5	88724	BFBT1-3098	95.1 - 97.5
88852	BFBT1-1045	42.6 - 45.0	88725	BFBT1-3100	97.6 - 100.0
88853	BFBT1-1048	45.1 - 47.5	88726	BFBT1-3103	100.1 - 102.5
88854	BFBT1-1050	47.6 - 50.0	88727	BFBT1-3105	102.6 - 105.0
88700	BFBT1-1053	50.0 - 52.5	88728	BFBT1-3108	105.1 - 107.5
88701	BFBT1-1055	52.6 - 55.0	88729	BFBT1-4103	100.1 - 102.5
88702	BFBT1-1058	55.1 - 57.5	88730	BFBT1-4105	102.6 - 105.0
88703	BFBT1-1060	57.6 - 60.0	88731	BFBT1-4108	105.1 - 107.5
88704	BFBT1-1063	60.1 - 62.5	88732	BFBT1-4110	107.6 - 110.0
88705	BFBT1-1065	62.6 - 65.0	88733	BFBT1-4113	110.1 - 112.5
88706	BFBT1-1068	65.1 - 67.5	88734	BFBT1-4115	112.6 - 115.0
88707	BFBT1-1070	67.6 - 70.0	88735	BFBT1-4118	115.1 - 117.5
88708	BFBT1-1073	70.1 - 72.5	88736	BFBT1-4120	117.6 - 120.0
88709	BFBT1-2068	65.1 - 67.5	88737	BFBT1-4123	120.1 - 122.5
88710	BFBT1-2070	67.6 - 70.0	88738	BFBT1-4125	122.6 - 125.0
88711	BFBT1-2073	70.1 - 72.5	88739	BFBT1-4128	125.1 - 127.5
88712	BFBT1-2075	72.6 - 75.0	88740	BFBT1-4130	127.6 - 130.0
88713	BFBT1-2078	75.1 - 77.5	88741	BFBT1-4133	130.1 - 132.5
88714	BFBT1-2080	77.6 - 80.0	88742	BFBT1-5128	125.1 - 127.5
88715	BFBT1-2083	80.1 - 82.5	88743	BFBT1-5130	127.6 - 130.0
88716	BFBT1-2085	82.6 - 85.0	88744	BFBT1-5133	130.1 - 132.5
88717	BFBT1-2088	85.1 - 87.5	88745	BFBT1-5135	132.6 - 135.0
88718	BFBT1-3083	80.1 - 82.5	88746	BFBT1-5138	135.1 - 137.5
88719	BFBT1-3085	82.6 - 85.0	88747	BFBT1-5140	137.6 - 140.0
88720	BFBT1-3088	85.1 - 87.5	88748	BFBT1-5143	140.1 - 142.5
88721	BFBT1-3090	87.6 - 90.0	88749	BFBT1-5145	142.6 - 145.0
88722	BFBT1-3093	90.1 - 92.5	88750	BFBT1-5148	145.1 - 147.5